



2016 Edition



www.bpfasteners.com

(877) 779-2583

Our Companies History,

Started in 2006, our company has been serving the construction industry both domestic and internationally with great success.

Blue Point Fasteners received ICC ES R-1530 which is the industry standard of technical evaluation for code compliance in 2009.

Blue Point Fasteners also received UL Listing for Conduit and Cable Hardware, #E472978 in 2016.

Areas we specialize in,

- *Manufacturing and Marketing**
- *Power Actuated Tools (Powder and gas)**
- *Electrical and Data-Comm Solutions**
- *Mechanical Anchors**
- *Drill Bits**
- *Screws**
- *Acoustical and Hanging Systems**

Company Mission Statement,

Blue Point Fasteners mission is to provide top quality products at competitive prices that will meet the needs of our customers. By utilizing our team of experts and continually striving to improve our products we will meet the ever changing demands of the construction industry.



Index

361 Fastening Tool	(Page 2)
Powder Actuated Tools	(Page 3)
Power Loads	(Page 4)
Pronto Trac Gas Tool	(Page 5)
Ninja Fastening Tool	(Page 6, 7)
Acoustic Pole Systems	(Page 8, 9, 10)
Drive Pins	(Page 11, 12, 13)
Pop Rivets	(Page 14)
Anchor and Drilling Systems	(Page 15, 16)
MegaMaxx Drill Bit	(Page 17)
Maxx Bits and Adapters	(Page 18)
Hanging System Solutions	(Page 19, 20)
Electrical Installation Solutions	(Page 21, 22)
Hooks and Hangers	(Page 23, 24, 25)
Hawks	(Page 26)
Dump Carts and Dollies	(Page 27, 28)
Drywall Bench	(Page 29)
Short Order Form	(Page 30)
Credit Application	(Page 31)



Power Adjuster



Applications and Advantages

- Automatic Piston Return & Cartridge Advance
- Fully Automatic Design (No Cycling is Required)
- Ceiling Pole Tool is Available to Accomplish Overhead Application

361 Tool w/ Magazine



Applications and Advantages

- Drywall Track Fastening
- Fully Automatic Design (No Cycling is Required)
- Able to Rapidly Drive 10 Fasteners without Reloading

Kit Accessories



Technical Data

Fastener Type: Flat & dome head single drive pins or threaded studs w/ flutes or 8 mm plastic washers

Fastener length range: 1/2" - 1-7/8"

Dimensions: 15.35" x 2" x 6.25"

Weight: 5lb

Powder Load Level: .27cal(6.8 x 11mm) strip loads

Color: Green, Yellow, Red

Item Name	QTY
1 361tool	1
2 Wrench M4	1
3 Wrench ST3.2	1
4 Ø18mm round hairbrush	1
5 Ø18-26mm brush	1
6 Body cleaning stick	1
7 Breach plug taper tpr plug	1
8 Ø5mm round hairbrush	1
9 Oiler	1
10 Goggles	1
11 Ear plugs	1
12 Instruction manual	1

Technical Data

Fastener Type: Flat & Dome Strip pins

Fastener length range: 1" - 1-1/4"

Dimensions: 15.35" x 2" x 6.25"

Weight: 5.4lb (with Magazine)

Powder Load Level: .27cal(6.8 x 11) strip loads

Color: Green, Yellow, Red

Item Name	QTY
1 361tool with magazine	1
2 Wrench M4	1
3 Wrench ST3.2	1
4 Ø18mm round hairbrush	1
5 Ø18-26mm brush	1
6 Body cleaning stick	1
7 Breach plug taper tpr plug	1
8 Ø5mm round hairbrush	1
9 Oiler	1
10 Goggles	1
11 Ear plugs	1
12 Instruction manual	1

BP-301

Technical Data:

- **Weight:** 5.07 lbs **Length:** 13-5/8"
- **Pin Type:** .300" /8mm head pin, 1/4" - 20 threaded stud
- **Pin Length:** 1/2" to 3" total length
- **Power Load:** .27cal. (6.8 x 11mm) 10 load strip
- **Power Color:** Green, Yellow, Red, Purple


Applications:

- Concrete forming
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base materials

- Normal-weight concrete
- Concrete masonry
- Steel

BP-35

Technical Data:

- **Weight:** 4.3 lbs **Length:** 11.42"
- **Pin Type:** .300" /8mm head pin, 1/4" - 20 threaded stud
- **Pin Length:** 1/2" to 1-1/2" total length
- **Power Load:** .25cal. 10 load strip
- **Power Color:** Green, Yellow, Red


Applications:

- Track to floor
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial construction
- Reliable & compact for short pin applications

Suitable Base materials

- Normal-weight concrete
- Concrete masonry
- Steel

BP-720

Technical Data:

- **Weight:** 4.4 lbs **Length:** 13.5"
- **Pin Type:** .300" /8mm head pin, 1/4" - 20 threaded stud
- **Pin Length:** 1/2" to 1-1/2" total length
- **Power Load:** .22cal. neck down load
- **Power Color:** Brown, Green, Yellow


Applications:

- Track to floor
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base materials

- Normal-weight concrete
- Concrete masonry
- Steel

BP-307

Technical Data:


- **Weight:** 4.08 lbs **Length:** 13.19"
- **Pin Type:** .300" /8mm head pin, 1/4" - 20 threaded stud
- **Pin Length:** 1/2" to 3" total length
- **Power Load:** .22cal. neck down load
- **Power Color:** Brown, Green, Yellow, Red


Applications:


- Track to floor
- Wood to concrete/steel
- Electrical fixture to concrete/ steel
- Conduit clip to concrete
- Commercial & residential construction

Suitable Base materials

- Normal-weight concrete
- Concrete masonry
- Steel



Model No.	Package/Qty	Size	Description	Color	Power	Power Level
27LS11L6	100 10000	6.8*11	.27cal long strip loads	Purple	Strongest	6
27LS11L5	100 10000			Red	Strong	5
27LS11L4	100 10000			Yellow	Medium	4
27LS11L3	100 10000			Green	Low	3
27LS11L2	100 10000			Brown	Lowest	2
25SS10L5	100 10000	6.3*10	.25cal strip loads	Red	Strong	5
25SS10L4	100 10000			Yellow	Medium	4
25SS10L3	100 10000			Green	Low	3
25SS10L2	100 10000			White	Lowest	2
25MD10L5	100 10000	6.3*10	.25cal metal disc loads	Red	Strong	5
25MD10L4	100 10000			Yellow	Medium	4
25MD10L3	100 10000			Green	Low	3
25MD10L2	100 10000			White	Lowest	2
22SGNDL5	100 10000	5.6*16	.22cal neck down single shot loads	Red	Strongest	5
22SGNDL4	100 10000			Yellow	Strong	4
22SGNDL3	100 10000			Green	Medium	3
22SGNDL2	100 10000			Brown	Low	2
22SGNDL1	100 10000			Gray	Lowest	1
22L4B	100 10000		.22cal neck down single shot loads, brass case	Yellow	Strong	4
22SGSWL6	100 10000	5.6*15	.22cal straight wall single shot loads	Purple	Strong	6
22SGSWL5	100 10000			Red	Medium	5
22SGSWL4	100 10000			Yellow	Low	4
22SGSWL3	100 10000			Green	Lowest	3
22SL6B	100 10000	5.6*15	.22cal straight wall single shot loads, Brass casing for Ninja tool	Purple	Strong	6
22SL5B	100 10000			Red	Medium	5
22SL4B	100 10000			Yellow	Low	4
22SL3B	100 10000			Green	Lowest	3
27LS11L3S		6.8*11	.27cal long strip loads for stud gun	Green	medium	3
27LS11L2S				Brown	low	2
27LS11L1S				Gray	lowest	1
27SGL3LB		6.8*18	.27cal(6.8*18) single shot long loads, brass case	Green	Lowest	3
27SGL4LB				Yellow	Low	4
27SGL5LB				Red	Medium	5
27SGL6LB				Purple	Strong	6

Item No.	Description
BP1.5	Gas fastening tool
 <p>This gas tool is compared to those by Powers®, Ramset®, Simpson® and others gas tools. The BP 1.5 takes up to 1-1/2" pins and the fuel cell normally used in the Powers®, Ramset®, Simpson® and others gas tools. Easy to operate and no special Licensing is required.</p>	

Features


Fast: 40-pin magazine and 1,200-shot fuel cell for reduced loading time
 *Easy to use: Automatic piston reset
 *Easy open jam release door
 *Portable: No hoses, cords, or external energy source required
 *Convenient: Simple 2-step pin loading and open-blade guide-jam release
 *Easy-load fuel compartment
 *No possibility of firing with no pins – when tool is down to last 2 pins in the pin magazine a "lock off" occurs
 *Ladder hook

Applications

*Acoustical
 *Drywall
 *Electrical
 *Data Com
 *General Purpose
 *Framing
 *Mechanical
 *Residential

Tool Specs

Tool dimensions: Length – 17.3", Width – 4.2"
 *Height – 15.3"
 *Weight: 8.3 lbs
 *Magazine capacity: 42
 *Average number of fastens per fuel cell: 1,200
 *Average number of fastens per battery charge: 3,300
 *Average battery charge time: 2 hours
 *Fastener type: Length – 1/2" to 1 1/2"
 *Diameter – .102" to .109"

Item No.	Description
PT13G	.100 Shank Dia., 1/2" Shank length collation pin with fuel cell
PT19G	.100 Shank Dia., 3/4" Shank length collation pin with fuel cell
PT25G	.100 Shank Dia., 1" Shank length collation pin with fuel cell
PT38G	.100 Shank Dia., 1-1/2" Shank length collation pin with fuel cell
 <p>.100 Shank Diam. Drive Pins Collated in strips of 10. Used to lay tracks. Also fits Powers®, Ramset®, Simpson® and others gas tools. Box includes 1000 pins + 1 fuel cell.</p>	

Accessories	Item No.	Description
	BP900476	Battery
	BP900477	Charger
	BP900478	Power Adapter
	N/A (Free in Kit)	Protective goggles & 3M® Ear plugs

Accessories	Item No.	Description
	FC150	Fuel Cell For BP1.5




Features and Benefits

- Lowest noise (db) level of any powder tool on the market
- Consistent low noise even in fractured concrete
- One pin and clip allows usage in multiple applications eliminating need for multiple inventories and more flexibility in pre-tying wires for jobs.
- Heavy duty shank for higher holding strengths
- Lightest ceiling tool weighing under 3-1/2 lbs.
- No recoil, reducing operator fatigue
- No piston to wear or break, ensuring low maintenance allowing longer tool operation.
- Simple and light weight to operate with adjustable length pole.
- Specially designed rubber handle makes it comfortable and non-conductive.
- Tool & pin provide dual guidance system to ensure continued straight driving penetration into work surface.
- Unique power venting system prevents overdrive and ensures consistent fastening into variable substrates, providing 1-1/4" penetration into soft or hard concrete.
- The pin and clip, as well as the slim profile tool design allows for threaded rod, pencil rod and wire to hang straight down allowing fastening in congested areas
- Use's standard PATMI 22 cal straight wall powder loads.


Technical Data

(Patent Pending)

Items	Description			Holding Values			
				Allowable load /		Ultimate load	
	Ninja drive pin with angle clip and washer			Light weight with decking 3000 PSI		4000 PSI	
	Item#	Shank Dia.	Shank length	Tension (lbs)	Shear (lbs)	Tension (lbs)	Shear (lbs)
	NC100	0.157"/	1"	175/957	372/1860	329/1644	377/1885
	NC125S	0.167"	1-1/4"	157/861	352/1767	296/1479	358/1790





Ninja Ceiling tool

	Item#	
	NJ-100	.22cal. Single shot Ninja ceiling tool for 1" NJ pin
patent pending	NJ-125	.22cal. Single shot Ninja ceiling tool for 1-1/4" NJ pin




Ninja Angle Clip Pin

	Item#		Master Qty
	NC100G	.307" (7.8mm) dia head, .157" dia shank, slim groove shank NJ pin w/NJ clip	1000
patent pending	NC100	.307" (7.8mm) dia head, .157" dia. smooth shank NJ pin w/NJ clip	1000
	NC125S	.307" (7.8mm) dia head, .157"/.167" dia. step shank NJ pin w/NJ clip	1000
	N125SRH2	.307" (7.8mm) dia head, .157"/.167" dia. step shank NJ pin with 1/4"-20 & 3/8"-16 all thread rod hanger clip	500
patent pending	N100G	.307" (7.8mm) dia head, .157" (4mm) dia. shank, 1" slim groove shank length NJ pin	1000
	N100	.307" (7.8mm) dia head, .157" (4mm) dia. smooth shank NJ pin	1000
patent pending	N125S	.307" (7.8mm) dia head, .157"/.167" dia. step shank NJ pin	1000

patent pending

Ninja Powder Loads

	Item No.	Size	Box		
	22SL6B	.22cal straight wall single shot loads for the Ninja ceiling tool	6	100	1000
	22SL5B		5	100	1000
	22SL4B		4	100	1000
	22SL3B		3	100	1000

Ninja Poles

Item No.			
	NP48	Ninja Mul func on Pole with non slip insulated rubber comfort grip, Nnja poles are also directly compable with all competitors tools	Aluminum Adjustable Mul func on Ceiling Pole – 4' to 8'
	NP412		Aluminum Adjustable Mul func on Ceiling Pole – 4' to 12'
	NP612		Aluminum Adjustable Mul func on Ceiling Pole – 6' to 12'
	NP618		Aluminum Adjustable Mul func on Ceiling Pole – 6' to 18'
	NP824		Aluminum Adjustable Mul func on Ceiling Pole – 8' to 24'







patent pending

Patent Pending



One Pole Does It All

- Available in adjustable sizes 4' to 24'
- More comfortable than any other pole on the market with Non slip insulated rubber comfort grip
- Fits Viper™ (I, II, III) , Sniper, Nitroset™ and Ninja forced entry ceiling tool systems
- Fits Viper™ IV with an adapter
- Most trigger operated PAT tools can be utilized with push reattachment
- Multiple attachment Configurations on the same pole makes you or your crew more productive.
- The Ninja pole allows you to install safely from the floor:
 - Eye lag screws
 - Purlin clip
 - Install screws
 - J-Hooks
 - Ceiling wires
 - Jack chain
 - Threaded rods
 - Etc.

Product Pic.	Description	Item No.
	Non slip insulated rubber comfort grip telescopic pole Connect two or more poles using the Ninja stack system (patent pending)	
	Adjustable Lengths	
	4', 2 sections—4' to 8'	NP48
	4', 3 sections—4' to 12'	NP412
	6', 2 sections—6' to 12'	NP612
	6', 3 sections—6' to 18'	NP618
	8', 2 sections—8' to 16'	NP816
	8', 3 sections—8' to 24'	NP824
	Eye Lag Head	NPA1
	Pre Tied Wire Head adaptor with 3/4 - 16 female thread	NPA2
	Universal Purlin clip Head	NPA8
	Hex Drive adapter	NPA3
	Viper 4 Connection adapter	NPA4



New

Patent Pending


Product Pic	Description	Part #
	Base attachment, 3/8" Hex drive	NPBA2
	Tie wire anchor installer	NPDA1
	Lock pin	NPLP
Comming Soon	1/2" Drive Head	NPA6
Comming Soon	9/16" Socket head	NPA7
	Drill chuck adapter	NPA9
Comming Soon	Base attachment, 1/2" Square drive	NPBA1
	PAT Pole Saddle head <i>Patent Pending</i>	NPA5



Patent Pending


Product No.	Description	Part #
 NPAK-1 Ninja Adapter Kits 1	<ul style="list-style-type: none"> • Tie wire wedge anchor • installer eyelag head • pretied wire head • hex drive adapter • lock pin • base attachment, 3/8" hex drive plastic case 	NPDA1 NPA1 NPA2 NPA3 NPLP NPBA2 NPAK-1C
 NPAK-2 Ninja Adapter Kits 2	<ul style="list-style-type: none"> • Tie wire wedge anchor • Installer eyelag head • Pretied wire head • Hex drive adapter • Viper 4 connection adapter • 9/16" socket head • Universal purlin clip head • Drill chuck adapter • Lock pin • Base attachment, 3/8" hex drive plastic case 	NPDA1 NPA1 NPA2 NPA3 NPA4 NPA7 NPA8 NPA9 NPLP NPBA2 NPAK-2C


Ninja Boot fits:


- Blue Point™ - BP301, BP35
- Hilti™ - DX35, DX350, DX2
- Simpson™ - PT-27
- Ramset™ - Cobroa, R25
- Powers™ - P3500, PA3500, P35s, P3600


Example: Ninja Pole with Boot
w/ BP301





NPA5



Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
.300" Flat Head Drive Pin Ballistic Point		PD13F10K	1/2" knurled	0.145"	100	1000	5000
		PD16F10K	5/8" knurled		100	1000	5000
		PD19F10	3/4"		100	1000	5000
		PD25F10	1"		100		1000
		PD32F10	1-1/4"		100		1000
		PD38F10	1-1/2"		100		1000
		PD44F10	1-3/4"	0.145"	100		1000
		PD51F10	2"		100		1000
		PD57F10	2-1/4"		100		1000
		PD63F10	2-1/2"		100		1000
		PD76F10	3"		100		1000
		PD157-50K	1/2" knurled	0.157"	100		1000


Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
.315 Diameter Head Premium Ballistic Point Steel Drive Pin		PP58SG	5/8" w/slim groove	0.157"	100	1000	5000


Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
.300 Head Diameter Drive Pins w/ Top Hat		PDTH13F10K	1/2" knurled	0.145"	100	1000	5000
		PDTH16F10K	5/8" knurled		100	1000	5000
		PDTH19F10	3/4"		100	1000	5000
		PDTH25F10	1"		100		1000


Decription		Item No.	Shank Length	Shank Dia.	Washer Size	Box	Master Box
.300 Head Drive Pin with 1" Metal Washer		PDW19-19F10	3/4"	0.145"	3/4"	100	1000
		PDW19-22F10	7/8"			100	1000
		PDW25-19F10	3/4"		1"	100	1000
		PDW25-25F10	1"			100	1000
		PDW25-32F10	1-1/4"			100	1000
		PDW25-38F10	1-1/2"			100	1000
		PDW25-51F10	2"			100	1000
		PDW25-63F10	2-1/2"			100	1000
		PDW25-76F10	3"			100	1000


Decription		Item No.	Shank Length	Shank Dia.	Washer Size	Box	Master Box
.300 Dia. Head Drive Pin with Insulation Washer		PDW36-38F10	1-1/2"	0.145"	1-7/16" (36mm)	100	1000
		PDW36-51F10	2"			100	1000
		PDW36-63F10	2-1/2"			100	1000
		PDW36-76F10	3"			100	1000


Decription		Item No.	Shank Length	Shank Dia.	Washer Size	Box	Master Box
.300 Dia. Head Drive Pin with Soft Insulation Washer		DP38F10/G	1-1/2"	0.145"	36mm/Gray	100	1000
.300 Dia. Head Drive Pin with Soft Insulation Washer		DP38F10/W			36mm/White	100	1000


Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
8mm Head, .145Shank, Drivepins		DN13P8K	1/2" knurled	3.7mm/ 0.145"	100	1000	5000
		DN16P8K	5/8" Knurled				
		DN19P8K	3/4" Knurled		100	1000	5000
		DN22P8	7/8"		100	1000	5000
		DN27P8	1"		100	1000	5000
		DN32P8	1-1/4"		100	1000	5000
		DN37P8	1-1/2"		100	1000	5000
		DN52P8	2"		100	1000	5000
		DN62P8	2-1/2"		100	1000	5000
		DN72P8	2-7/8"		100	1000	5000


Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
8mm Head Drive Pin w/ Top Hat		DNTH16P8K	5/8" knurled	3.7mm/ 0.145"	100	1000	5000
		DNTH22P8	7/8"		100	1000	5000
		DNTH25P8	1"		100	1000	5000


Decription		Item No.	Shank Length	Shank Dia.	Box	Master Box
8mm Head Collated Drive Pin		DNC13K	1/2" knurled	0.145"	100	1000
		DNC19K	3/4" knurled		100	1000
		DNC19	3/4"		100	1000
		DNC22	7/8"		100	1000
		DNC27	1"		100	1000
		DNC32	1-1/4"		100	1000
		DNC37	1-1/2"		100	1000
		DNC52	2"		100	1000
		DNC62	2-1/2"		100	1000
		DNC72	2-7/8"		100	1000


Decription		Item No.	Shank Length	Shank Dia.	Box	Master Box
8mm Head Premium Collated Ballistic Point Slim Groove Drive Pin	 <div style="position: absolute; top: 0; left: 0; color: white; font-weight: bold; font-size: 1.2em;">NEW</div> <div style="position: absolute; top: 0; left: 50px; color: red; font-size: 0.8em;">Now in .157"</div>	PPC58SG	5/8"	0.157"	100	1000
		PPC75SG	3/4"		100	1000
		PPC78SG	7/8"		100	1000
		PPC100SG	1"		100	1000
		PPC125SG	1-1/4"		100	1000
		PPC150SG	1-1/2"		100	1000
		PPC200SG	2"		100	1000
		PPC250SG	2-1/2"		100	1000
		PPC288SG	2-7/8"		100	1000


Decription		Item No.	Shank Length	Shank Dia.	Box	Case	Master Box
5.7mm Head Drivepin with 1/2" Metal Washer		NK16W12K	5/8"	0.145"	100	1000	5000
		NK19W12K	3/4"		100	1000	5000
		NK27W12	1"		100	1000	5000
		NK32W12	1-1/4"		100	1000	5000
		NK37W12	1-1/2"		100	1000	5000


Decription		Item No.	Shank Length	Thread Length	Box	Master Box
1/4"-20 threaded stud w/1/2" plastic washer and metal washer		M1/4-19-13D12K	1/2"	3/4"	100	1000
		M1/4-19-25D12	1"		100	1000
		M1/4-19-32D12	1-1/4"		100	1000


Decription		Item No.	Shank Length	Thread Length	Box	Master Box
1/4"-20 Threaded Stud w/.300 Thread Plastic Cap		M1/4PH-13-13F10	1/2"	1/2"	100	1000
		M1/4PH-13-25F10	1"		100	1000
		M1/4PH-19-13F10K	1/2"K		100	1000
		M1/4PH-19-25F10	1"	3/4"	100	1000
		M1/4PH-19-32F10	1-1/4"		100	1000


Decription		Item No.	Shank Length	Thread Length	Box	Master Box
3/8" - 16 Threaded Stud		M3/8-32-16F10K	5/8"K		100	1000
		M3/8-32-19F10K	3/4"K	1-1/4"	100	1000
		M3/8-32-25F10	1"		100	1000
		M3/8-32-32F10	1-1/4"		100	1000


Decription		Item No.	Shank Length	Conduit Clip Size	Box	Master Box
.300 Head Top Hat Pin w/ Conduit Clip		PDCC38-25F10	1"	3/8"	50	500
		PDCC50-25F10	1"	1/2"	50	1000
		PDCC50-32F10	1-1/4"		50	500
		PDCC75-25F10	25mm /1"	3/4"	50	500
		PDCC75-32F10	32mm /1-1/4"		50	500
		PDCC100-25F10	1"	1"	50	500
		PDCC100-32F10	1-1/4"		50	500




Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
.300 Head Drive Pin w/ 90 Degree Angle Clip		PDAC90-25F10	1"	0.145"	90°	100	1000
		PDAC90-32F10	1-1/4"			100	1000
		PD157-100C90	1"	0.157"		100	1000

Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
.300 Head Drive Pin w/ 120 Degree Angle Clip		PDAC120-25F10	1"	0.145"	120°	100	1000
		PDAC120-32F10	1-1/4"			100	1000
		PD157-100C120	1"	0.157"		100	1000

Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
.300 Head Top-Hat Pin w/ 90 degree Angle Clip		PD157-78THC90	7/8"	0.157"	90°	100	1000
		PDSS-125THC90	1-1/4"	0.150"/0.180"		100	1000


Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
8mm Head Top-Hat Pin w/ 90 Degree Angle Clip		DNTH25P8	1"	3.7mm	90°	100	1000
		DNTH32P8	1-1/4"				


Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
Timber Pin w/ Clip		TMC250	2-1/2"	0.172"	120°	100	1000

Decription		Item No.	Shank Length	Shank Dia.	Clip Type	Box	Master Box
Ninja Pin w/ NJ Clip		NC100	1"	0.157"	NJ Clip	100	1000
		NC125S	1-1/4"	0.157"/0.167"		100	1000
		NC100G	1"	0.157"		100	1000
Ninja Smooth Shank Pin		N100	1"	0.157"	None	100	1000
Ninja Grooved Shank Pin		N100G	1"	0.157"	None	100	1000

Features and Benefits

- Quick and easy installation from one side of the workpiece
- Available in Dome or Countersunk Head
- Colored head match to Pantone, RAL or sample upon request



	Item No.	Description	Diameter	Rivet Length	Package
	AA42W BULK	5052 Aluminum alloy rivets with aluminum mandrels	1/8"	0.275"	10000pcs/ctn
	AA42W 1000				1000pcs/box, 20box/ctn
	AA42W 100				100pcs/bag, 10bag/box, 12box/ctn
	AA42B 1000				10000pcs/ctn
	AA42B BULK				1000pcs/box, 20box/ctn
	AA44W BULK			0.4"	10000pcs/ctn
	AA44W 1000				1000pcs/box, 20box/ctn
	AA44B BULK				10000pcs/ctn
	AA44B 1000				1000pcs/box, 20box/ctn

Technical Data

AA 5052 Aluminum rivets with Aluminum alloy mandrels

IFI1114 Grade11

RIVET CODE	RIVET DIAMETER	HOLE SIZE (inch)	RIVET LENGTH L (max)	GRIP RANGE (inch)	HEAD DIAMETER H (inch)	HEAD THICKNESS T (inch)	STANDARD STRENGTH Lbs (min.)	
							SHEAR	TENSILE
32	3/32 2.4mm	0.097	0.250	0.020 - 0.125	0.178	0.032	70	80
34		~	0.375	0.126 - 0.250	~			
36		0.100	0.500	0.251 - 0.375	0.198			
41	1/8 3.2mm	0.129	0.212	0.020 - 0.062	0.238	0.040	120	150
42			0.275	0.063 - 0.125	~			
43			0.337	0.126 - 0.187	0.188			
44			0.400	0.188 - 0.250	0.251			
45		~	0.462	0.251 - 0.312	~			
46		0.133	0.525	0.313 - 0.375	0.262			
48			0.650	0.376 - 0.500	0.375			
410			0.775	0.501 - 0.625	0.500			
412			0.901	0.626 - 0.750	0.625			
52	5/32 4.0mm	0.160	0.300	0.020 - 0.125	0.296	0.050	190	230
53			0.362	0.126 - 0.187	~			
54			0.425	0.188 - 0.250	0.188			
55		~	0.487	0.251 - 0.312	0.251			
56		0.164	0.550	0.312 - 0.375	0.312			
58			0.675	0.376 - 0.500	0.375			
510			0.800	0.501 - 0.625	0.500			
512			0.925	0.626 - 0.750	0.625			
62	3/16 4.8mm	0.192	0.325	0.020 - 0.125	0.356	0.060	260	320
63			0.387	0.126 - 0.187	~			
64			0.450	0.188 - 0.250	0.188			
65			0.513	0.251 - 0.312	0.251			
66		~	0.575	0.312 - 0.375	~			
68		0.196	0.700	0.376 - 0.500	0.375			
610			0.825	0.501 - 0.625	0.500			
612			0.950	0.626 - 0.750	0.625			
614			1.075	0.751 - 0.875	0.750			
616			1.200	0.876 - 1.000	0.875			
82	1/4 6.4mm	0.257	0.375	0.020 - 0.125	0.475	0.080	460	560
84			0.500	0.126 - 0.250	~			
86			0.625	0.251 - 0.375	0.251			
88		~	0.750	0.376 - 0.500	0.375			
810		0.261	0.875	0.501 - 0.625	0.500			
812			1.000	0.626 - 0.750	0.625			
814			1.125	0.751 - 0.875	0.750			
816			1.250	0.876 - 1.000	0.875			



HR-702 Aluminum Riveter (In 2 jaws)



HR-705 Aluminum hand riveter (In 2 jaws)
(up to 4.8mm for all material)





HR-708 Aluminum hand riveter (In 3 jaws)
(up to 4.8mm for all material)



PPK HD Punch Plier





Concrete Screws

- Available in 1/4" and 3/16" diameter
- No insert required
- Removable fastener
- Can be used in pressure treated lumber
- Available in either Philips head or hex head
- Length up to 6"

	Item No.	Description	Size	Box	Carton
	CSF316114	Philips flat head concrete screw	3/16" x 1-1/4"	100	1000
	CSF316334		3/16" x 1-3/4"	100	1000
	CSF316214		3/16" x 2-1/4"	100	1000
	CSF14114		1/4" x 1-1/4"	100	1000
	CSF14134		1/4" x 1-3/4"	100	1000
	CSF14214		1/4" x 2-1/4"	100	1000
	CSF14234		1/4" x 2-3/4"	100	1000
	CSF14314		1/4" x 3-1/4"	100	1000
	CSF14334		1/4" x 3-3/4"	100	1000
	CSF14400		1/4" x 4"	100	1000
	CSH316114	5/16" Hex head	3/16" x 1-1/4"	100	1000
	CSH316334		3/16" x 1-3/4"	100	1000
	CSH316214		3/16" x 2-1/4"	100	1000
	CSH14114		1/4" x 1-1/4"	100	1000
	CSH14134		1/4" x 1-3/4"	100	1000
	CSH14214		1/4" x 2-1/4"	100	1000
	CSH14234		1/4" x 2-3/4"	100	1000
	CSH14314		1/4" x 3-1/4"	100	1000
	CSH14334		1/4" x 3-3/4"	100	1000
	CSH14400		1/4" x 4"	100	1000




Mechanical Anchors

- Available in several designs for the best solution to your fastening requirements

	Item No.	Description	Size	Box	Carton
	SLA38178	Sleeve anchor hex nut	3/8" x 1-7/8"	50	500
	SLA38300		3/8" x 3"	50	400
	SLA12214		1/2" x 2-1/4"	25	250
	SLA12234		1/2" x 2-3/4"	25	250
	SLA12300		1/2" x 3"	25	200
	DIA1258200	Drop in anchor	1/2" x 5/8" x 2"	50	500
	DIA1258200T	Drop in anchor, w/ 1 tool/box	1/2" x 5/8" x 2"	50	500
	DIA38121916	Drop in anchor	3/8" x 1/2" x 1-9/16"	50	500
	DIA38121916T	Drop in anchor, w/ 1tool/box	3/8" x 1/2" x 1-9/16"	500	500
	TWA14214	Tie wire anchor	1/4" x 2-1/4"	100	1000
	TWA14218		1/4" x 2-1/8"	100	1000
	TWSA14214	Tie wire split drive anchor	1/4" x 2-1/4"	100	1000

New

Mechanical Anchors

	Item No.	Description	Size	Box	Carton
	WA12700	WEDGE ANCHOR	1/2" x 7"	25	150
	WA38214		3/8" x 2-1/4"	50	500
	WA38234		3/8" x 2-3/4"	50	400
	WA38300		3/8" x 3"	50	400
	WA38312		3/8" x 3-1/2"	50	300
	WA38334		3/8" x 3-3/4"	50	300
	WA38500		3/8" x 5"	50	250
	WA38612		3/8" x 6-1/2"	50	250
	WA38800		3/8" x 8"	50	250
	WA12234		1/2" x 2-3/4"	25	200
	WA12334		1/2" x 3-3/4"	25	150
	WA12414		1/2" x 4-3/4"	25	150
	WA12412		1/2" x 4-1/2"	25	150
	WA12512		1/2" x 5-1/2"	25	150
	WA127		1/2" x 7"	25	150
	WA12812		1/2" x 8-1/2"	10	30
	WA1210		1/2" x 10"	10	30
	WA1212		1/2" x 12"	10	30
	WA58312		5/8" x 3-1/2"	10	100
	WA58412		5/8" x 4-1/2"	10	100
	WA585		5/8" x 5"	10	100
	WA586		5/8" x 6"	10	50
	WA587		5/8" x 7"	10	30
	WA58812		5/8" x 8-1/2"	10	30
	WA5810		5/8" x 10"	10	30
	WA5812		5/8" x 12"	10	30
	WA34414		3/4" x 4-1/4"	10	60
	WA34434		3/4" x 4-3/4"	10	60
	WA34512		3/4" x 5-1/2"	10	50
	WA34614		3/4" x 6-1/4"	10	30
	WA347		3/4" x 7"	10	30
	WA34812		3/4" x 8-1/2"	10	30
	WA3410		3/4" x 10"	10	30
	WA3412		3/4" x 12"	10	30
	NIZ1434	Nail in Zamac Anchor	1/4" x 3/4"	100	1000
	NIZ31678		3/16" x 7/8"	100	1000
	NIZ14100		1/4" x 1"	100	1000
	NIZ14114		1/4" x 1-1/4"	100	1000
	NIZ14112		1/4" x 1-1/2"	100	1000
	NIZ14200		1/4" x 2"	100	1000
	NIZ14212		1/4" x 2-1/2"	100	1000
	NIZ14300		1/4" x 3"	100	1000
	NIP14100	Plastic nail in anchor	1/4" x 1"	100	1000
	NIP14114		1/4" x 1-1/4"	100	1000
	NIP14112		1/4" x 1-1/2"	100	1000
	NIP14200		1/4" x 2"	100	1000
	NIP14212		1/4" x 2-1/2"	100	1000


MEGAMAXX

The **B.M.F.** Bit

RESEARCH AND DEVELOPMENT



Tungsten Carbide
Self-centering point
Chiseling effect

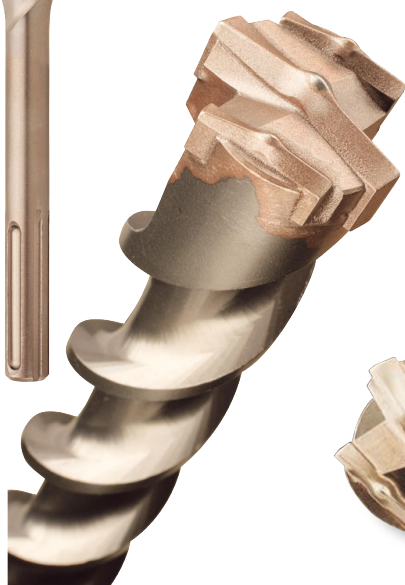


The **MEGAMAXX**
Advantage


6 Carbide Cutters
6 Lateral Supports
Center Point




Resists *Flex*



Resists *Torsion*



Resists *Compression*



► *More Material*

Flex exerted in the lower section of a drill bit is the most likely destructive factor. The progressive core of the spiral adds material and increases the rigidity in this area which is subjected to extreme pressure.

► *Anti-blocking System*

6 asymmetric cutting edges reduce the risk of blockage when in use on a particularly hard aggregate, or on rebar. The progressive core and the roundness of the flute allow optimal removal of dust and negates any risk of blocking due to dust accumulation.

► *Heat Treatment*

The hardness of concrete combined with the power of the drill unite to create compression. The heat treatment of the body allows the energy of the drill to be concentrated on the tungsten carbide tip (while absorbing shock waves).


Part No.	Description	Qty.
MX3813	3/8" x 13" MEGA	Each
MX1213	1/2" x 13" MEGA	Each
MX1221	1/2" x 21" MEGA	Each
MX5813	5/8" x 13" MEGA	Each
MX5821	5/8" x 21" MEGA	Each
MX5836	5/8" x 36" MEGA	Each
MX3413	3/4" x 13" MEGA	Each
MX3421	3/4" x 21" MEGA	Each
MX3427	3/4" x 27" MEGA	Each
MX3436	3/4" x 36" MEGA	Each
MX7813	7/8" x 13" MEGA	Each
MX7827	7/8" x 27" MEGA	Each
MX1113	1" x 13" MEGA	Each
MX127	1" x 27" MEGA	Each
MX11813	1-1/8" x 13" MEGA	Each
MX11413	1-1/4" x 13" MEGA	Each




The **D^{MAXX}** Advantage

2 cutting edges
4 lateral supports


Tungsten Carbide
Self-centering point
Chiseling effect



Resists Flex

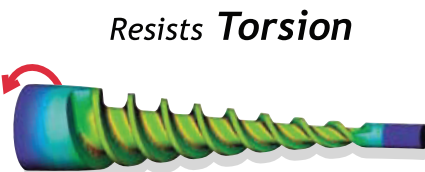

Resists Torsion



Resists Compression

D^{MAXX}



Quatro^{MAXX} STOP



Adapt^{MAXX}



► More Material

Flex exerted in the lower section of a drill bit is the most likely destructive factor. The progressive core of the spiral adds material and increases the rigidity in this area which is subjected to extreme pressure.

► Anti-blocking System

2 asymmetric cutting edges reduce the risk or blockage when in use on a particularly hard aggregate, or on rebar. The progressive core and the roundness of the flute allow optimal removal of dust and negates any risk of blocking due to dust accumulation.

► Heat Treatment

The hardness of concrete combined with the power of the drill unit to create compression. The heat treatment of the body allows the energy of the drill to be concentrated on the tungsten carbide tip (while absorbing shock waves).

Part No.	Description	Qty.
DX146	1/4" x 6" DMax	Each
DX148	1/4" x 8" DMax	Each
DX386	3/8" x 6" DMax	Each
DX388	3/8" x 8" DMax	Each
DX3812	3/8" x 12" DMax	Each
DX128	1/2" x 8" DMax	Each
DX1212	1/2" x 12" DMax	Each
DX588	5/8" x 8" DMax	Each
DX5812	5/8" x 12" DMax	Each

Part No.	Description	Qty.
QX381116	3/8" x 1-1/16" QMax	Each
QX121316	1/2" x 13/16" QMax	Each
QX1211116	1/2" x 1-11/16" QMax	Each
QX581316	5/8" x 1-3/16" QMax	Each
QX582116	5/8" x 2-1/16" QMax	Each

Part No.	Description	Qty.
AXSP2SDS	Spline to SDS Adapter	Each
AXSDS2SDSP	SDSMAX to SDS PLUS Adapter	Each



Pretied Ceiling Wire

- ICC-ES ESR-1530 certified pins
- Meets or exceeds wire standards ASTM A641-92
- All wires are tied with the hospital wrap
- Tie requirement to ensure maximum holding power as dictated by building code
- Wire gauge: 8 thru 12 gauge
- Length: 2', 4', 6', 8', 10', 12', 14', 16', 18', 20'
- Custom lengths also available
- Multiple wire termination options (see below)
- Wire can be purchased by:
 - a) Container for maximum savings
 - b) Bundles of 100pcs capped and wrapped securely
 - c) Master bundles of 20 - 100pc bundles
 - d) Steel crates that are stackable

Technical Data - 12 gauge wire

Diameter	Tensile Range	Zinc Thickness
0.105"	75ksi max	≥25g/m ²

Straight Cut Wire Available




Coiled Wire Available



Hospital Tied



8 Gauge Tied



12 Gauge Double Tied



Master Bundle

Small bundle



(Include 100pcs)



(Include 20 small bdls)






Steel Crates



Boundles/ Steel Crate

Wire length 4'	160 bdls
Wire length 6'	140 bdls
Wire length 8'	120 bdls

Wire Attachment Options

	Item No.	Shank Lgth	Description	Box	Carton
	PD157-78THC90	7/8"	.300 dia. head, .157" shank dia. top hat drive pin w/ 90° angle clip (Ramset SPC78/for hard concrete)	100	1000
	PDSS-125THC90	1-1/4"	.300 dia. head, .150"/.180" step shank dia. top hat pin w/ 90° angle clip (Ramset SPC114/for hard concrete)	100	1000
	PDAC90-25F10	1"	7.6 mm / .300" dia. head, 3.7mm / .145" dia shank pin with 90 degree angle clips	100	1000
	PDAC90-32F10	1-1/4"			
	PD157-100C90	1"	.300 dia. head, .157" shank dia. pin w/ 90° angle clip	100	1000
	PDAC120-25F10	1"	7.6 mm / .300" dia. head, 3.7mm / .145" dia shank pin w/ 120° angle clip	100	1000
	PDAC120-32F10	1-1/4"			
	PD157-100C120	1"	.300" dia. head, .157" dia shank pin w/ 120° angle clip	100	1000
	TMC250	2-1/2"	.312" dia. head, .172" dia. shank, 2-1/2" shank length timber pin w/ 120° angle clip	100	1000
	NC125S	1-1/4"	.307"(7.8mm) dia head, .157"/.167" dia step shank, 1-1/4" shank length NJ pin w/NJ clip	100	1000
	NC100	1"	.307"(7.8mm) dia head, .157" dia shank, 1" shank length NJ pin w/NJ clip	100	1000

New

Wire Attachment options				
	Part No.	Description	Box	Carton
	EL300W	3" wood eye lag screw Zink	100	1000
	EL400W	4" wood eye lag screw Zink	100	1000
	EL500W	5" wood eye lag screw Zink	100	1000
	EL750SD	2" overall length, 1/2" thread length, 3/4" from collar to drill point	100	1000
	EL150SP	2-3/4" overall length, 1-1/2" thread length	100	1000
	EL200SD	3-1/4" overall length, 1-3/4" threaded length, 2" from collar to drill point	100	1000
	TWA14214	1/4" x 2-1/4" Tie wire anchor	100	1000
	TWA14218	1.4" x 2-1/8" Tie wire anchor	100	1000
	TWSA14214	1/4" x 214" Tie wire split drive anchor	100	1000
	HO-25	1/8" - 1/4" Beam clamp	100	1000
	HO-50	5/16" - 1/2" Beam clamp	100	1000
	PC-25	1/8" - 1/4" Purlin clip	100	1000
	PCZ-25	1/8" - 1/4" Z purlin clip	100	1000
	AC90	90 degree angle clip	100	1000
	AB90		100	1000
	SP45		100	1000
	TWM1	Electric EZ Wire Tie Machine/ 110V		

New

Conduit Clip

- Conduit clip, 1/2" to 3/4" Max load vertical 100lbs. Horizontal 25lbs



Part No.	Description	Box	Carton
CC-50	1/2" Conduit clamps	100	1000
CC-75	3/4" Conduit clamps	100	1000
CC-100	1" Conduit clamps	100	1000
CC-125	1-1/4" Conduit clamps	100	1000
CC-150	1-1/2" Conduit clamps	100	1000
CC-200	2" Conduit clamps	100	1000

Conduit Assembly

- Hammer on flange
- Conduit clip Bolt close for guaranteed closing
- Conduit size: 1/2" to 3/4"



Part No.	Description	Box	Carton
CC-50-1	Hammer on flange conduit clip 1/2" to 3/4" steel	100	1000
BC-CC50	Beam clamp with conduit clip	100	1000

Split Drive Anchor

- One-piece, vibration resistant construction
- Available in flat or mushroom head design
- Available in various sizes for 3/16", 1/4", 3/8" and 1/2" drills diameter



Part No.	Description	Box	Carton
SD-2515	1/4" x 1-1/2" split drive, flat head	100	1000
SD-252	1/4" x 2" split drive, flat head	100	1000
SD-25225	1/4" x 2-1/4" split drive, flat head	100	1000
SD-2525	1/4" x 2-1/2" split drive, flat head	100	1000
SD-253	1/4" x 3" split drive, flat head	100	1000

Bridle Ring


- Available in sizes from 3/4" to 2"



Part No.	Description	Box	Carton
BR10-75	10-24 x 3/4" Bridle ring	100	1000
BR10-200	10-24 x 2" Bridle ring	100	1000
BR25-125	1/4" - 20 x 1-1/4" Bridle ring	100	1000
BR25-200	1/4" - 20 - 2" Bridle ring	100	1000

Steel Spring Cable Conduit Clip


- Available sizes 3/8" to 3/4"



Part No.	Description	Box	Carton
CC-3850	3/8" - 1/2" Conduit clips #12-1/4"	100	1000
CC-5075	1/2" - 3/4" Conduit clips #12-1/4"	100	1000
CC-75100	3/4" - 1" Conduit clips #12-1/4"	100	1000

Dual-Thread Rod Hanger

- Good for both sizes 1/4" -20 and 3/8"-16 threaded rods



Part No.	Description	Box	Carton
RH3	90° angle clip with dual thread holes	100	500

New/ Patent pending

Conduit Clip w/ Pin


- For use with powder actuated tools
- Clip sizes from 1/2" to 1"



Part No.		Description	Box	Carton
PDCC50-25F10	1"	.300" dia. head, 3.7mm/.145" dia.shank, drive pins with 1/2" conduit clip	100	1000
PDCC50-32F10	1-1/4"		100	1000
PDCC75-25F10	1"	.300" dia. head, 3.7mm/.145" dia.shank, drive pins with 3/4" conduit clip	100	1000
PDCC75-32F10	1-1/4"		100	1000
PDCC100-25F10	1"	.300" dia. head, 3.7mm/.145" dia.shank, drive pins with 1" conduit clip	50	500
PDCC100-32F10	1-1/4"		50	500
PDCC25-25F10	1"	.300" dia. head, 3.7mm/.145" dia.shank, drive pins with 1/4" conduit clip	100	1000
PDCC38-25F10	1"	.300" dia. head, 3.7mm/.145" dia.shank, drive pins with 3/8" conduit clip	100	1000
DNCC75-25F10	1"	8mm dia. head, 3.7mm/.145" dia.shank, drive pins with 3/4" conduit clip	100	1000

Pencil Rod


- Pencil rod, Diameter 1/4"
- Additional diameters and lengths available

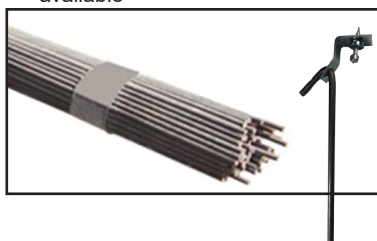

Part No.		Description	Bundle	Pallet
PR25-4	Pencil rod 1/4" x 4'		100	TBD
PR25-6	Pencil rod 1/4" x 6'		100	TBD
PR25-8	Pencil rod 1/4" x 8'		100	TBD
PR25-10	Pencil rod 1/4" x 10'		100	TBD
PR25-12	Pencil rod 1/4" x 12'		100	TBD

Threaded Rod


- Threaded rod/ All thread, diameter 1/4"
- Additional diameters and lengths available



Part No.		Description	Bundle	Pallet
AT254	Threaded rod/ All thread 1/4" x 4'		100	TBD
AT256	Threaded rod/ All thread 1/4" x 6'		100	TBD
AT258	Threaded rod/ All thread 1/4" x 8'		100	TBD
AT2510	Threaded rod/ All thread 1/4" x 10'		100	TBD
AT2512	Threaded rod/ All thread 1/4" x 12'		100	TBD

Attachments



	Item No.	Description
	BR -10 -75	10-24 X 3/4" Bridle Ring
	BR10 -200	10-24 X 2" Bridle Ring
	BR25 -125	1/4"-20 X 1-1/4" Bridle Ring
	BR25 -200	1/4"-20 X 2" Bridle Ring

	Part No.	Description
	PC - 25	1/16"-1/4' Purlin Clip
	PCZ -25	1/16"-1/4" Z-Purlin Clip
	HO -25	1/8"-1/4" Beam Clip
	HO -50	5/16"-1/2" Beam Clip
	AC-90	90° Angle Clip
	PDAC90 -32F10	90° Angle Clip w/1-1/4" Pin
	EC25	1/4"-20 Eye Coupling
	PC -25EC	1/16" - 1/4" Purlin Clip w/ 1/4"-20 Eye Coupling
	PC-25EC38	1/16" - 1/4" Purlin Clip w/ 3/8"-16 Eye Coupling
	PCZ -25EC	1/16" - 1/4" Z Purlin Clip w/ 1/4"-20 Eye Coupling
	HO -25EC	1/8" - 1/4" Beam Clip w/ 1/4"-20 Eye Coupling
	HO -50EC	5/16" - 1/2" Beam Clip w/ 1/4"-20 Eye Coupling

	Part No.	Description
	BCS-50AC	Beam Clamp up to 1/2" w/90° Angle Clip
	BCS - 50	Beam Clamp up to 1/2"
	BC- 50	Beam Clip up to 1/2"
	BW-25	#12 - 1/4" Bat-Wing Clip
	FR1/4-ACP32	90° Angle Clip & 1-1/4" Pin w/ 1/4"-20 Eye Coupling
	FR1/4- AC	90° Angle Clip w/ 1/4"-20 Eye Coupling
	RH3	90° Angle Clip for 1/4"-20 & 3/8"-16
	N125SRH2	90° Angle Clip w/1-1/4" Pin for 1/4"-20 & 3/8"-16
	PD157-125RH1	90° Angle Clip w/1-1/4" Pin for 1/4"-20 & 3/8"-16

Patent Pending






New

New

New



















Super Screw for Concrete, Wood & Steel

Product	Item No.	Description
	2520RC150SP	1/4-20 rod coupling, point to collar 1-1/2" length, heat treated screw, non-detachable hex coupling
	3816RC75SD	3/8-16 rod coupling point to collar 1-1/2" length, heat treated screw, non-detachable hex coupling
	2520RC75SD	1/4-20 rod coupling drill point to collar 3/4" length self-drilling, heat treated screw, 16 to 22ga. sheet metal, non-detachable hex coupling
	3816RC200SP	3/8 X 16 rod coupling with 2' sharp point screw
		Concrete screw with ScrewCon™ thread

Eye lag screws

	EL300W	3" wood eye lag screw SP
	EL400W	4" wood eye lag screw SP
	EL500W	5" wood eye lag screw SP
	EL75SD	2" overall length, 1/2" thread length, 3/4" from collar to self drill point
	EL150SP	2-3/4" overall length, 1-1/2" thread length SP
	EL200SD	3-1/4" overall length, 1-3/4" threaded length, 2" from collar to self drill point

 <p>Hooks and Hangers</p>													
			Multi-Function Clip "Bat Wing" for #12-1/4"	Purlin Clip	Z-Purlin Clip	Hammer on Beam Clip 1/8"-1/4" Flange	Hammer on Beam Clip 5/16"-1/2" Flange	Beam Clip up to 1/2"	Beam Clamp up to 1/2"	Beam Clamp Rotates 360°	Angle Clip & 1-1/4" Pin	Angle Clip	1/4"-20 Eye Coupling
	Size	Part #	Part #	Part #	Part #	Part #	Part #	Part #	Part #	Part #	Part #	Part #	Part #
	1"	P-100	P-100BW25	P-100PC	P-100PC	P-100PCZ	P-100HO50	P-100BC	P-100BCS	P-100BCA	P-100PDAC	P-100AC	P-100EC
	2"	P-200	P-200BW25	P-200PC	P-200PC	P-200PCZ	P-200HO50	P-200BC	P-200BCS	P-200BCA	P-200PDAC	P-200AC	P-200EC
	3"	P-300	P-300BW25	P-300PC	P-300PC	P-300PCZ	P-300HO50	P-300BC	P-300BCS	P-300BCA	P-300PDAC	P-300AC	P-300EC
	3/4"	J-75	J-75BW25	J-75PC	J-75PCZ	J-75HO25	J-75HO50	J-75BC	J-75BCS	J-75BCA	J-75PDAC	J-75AC	J-75EC
	1-5/16"	J-131	J-131BW25	J-131PC	J-131PCZ	J-131HO25	J-131HO50	J-131BC	J-131BCS	J-131BCA	J-131PDAC	J-131AC	J-131EC
	2"	J-200	J-200BW25	J-200PC	J-200PCZ	J-200HO25	J-200HO50	J-200BC	J-200BCS	J-200BCA	J-200PDAC	J-200AC	J-200EC
	4"	J-400	J-400BW25	J-400PC	J-400PCZ	J-400HO25	J-400HO50	J-400BC	J-400BCS	J-400BCA	J-400PDAC	J-400AC	J-400EC
	3/4"	T-75	T-75BW25	T-75PC	T-75PCZ	T-75HO25	T-75HO50	T-75BC	T-75BCS	T-75BCA	T-75PDAC	T-75AC	T-75EC
	1-5/16"	T-131	T-131BW25	T-131PC	T-131PCZ	T-131HO25	T-131HO50	T-131BC	T-131BCS	T-131BCA	T-131PDAC	T-131AC	T-131EC
	2"	T-200	T-200BW25	T-200PC	T-200PCZ	T-200HO25	T-200HO50	T-200BC	T-200BCS	T-200BCA	T-200PDAC	T-200AC	T-200EC
	4"	T-400	T-400BW25	T-400PC	T-400PCZ	T-400HO25	T-400HO50	T-400BC	T-400BCS	T-400BCA	T-400PDAC	T-400AC	T-400EC
	2"	T-75	M-200BW25	M-200PC	M-200PCZ	M-200HO25	M-200HO50	M-200BC	M-200BCS	M-200BCA	M-200PDAC	M-200AC	M-200EC

ULTRA LITE HAWK
12", 13", 14" Inch with Comfort Handle
Features

Ultra Lite Weight Composite
 Weighs only 1.1 lbs

Aluminum Non Flex Face
 Bonded Layer Material
 Light weight yet stays flat

NO NICK SURFACE

No Rivets
 Hi-Tech Structural Bonded
 Total Smooth Top Surface

Non Corrosive Materials


Used for holding EFIS, Hard Coat Stucco and plaster during application

Comfort Grip Handle

Comfortable Non Slip Grip
 Sponge callus preventer included

Never Nick your Tools on loose rivets again
 Tacky surface holds mud cleans off smooth with your trowel

Sponge Callus preventer included on all sizes


ULTRA Composite HAWK
12", 13", 14" Inch with Comfort Handle
Features

Ultra Lite Weight Composite
 Weighs 1/3 Less than
 Magnesium Hawks

Composite Non Flex Face
 Light weight yet stays flat

NO NICK SURFACE

No Rivets
 Hi-Tech Structural Bonded
 Total Smooth Top Surface


Non Corrosive Materials

Used for holding EFIS, Hard Coat Stucco and plaster during application

Comfort Grip Handle


Comfortable Non Slip Grip
 Sponge callus preventer included

Never Nick your Tools on loose rivets again
 Tacky surface holds mud cleans off smooth with your trowel

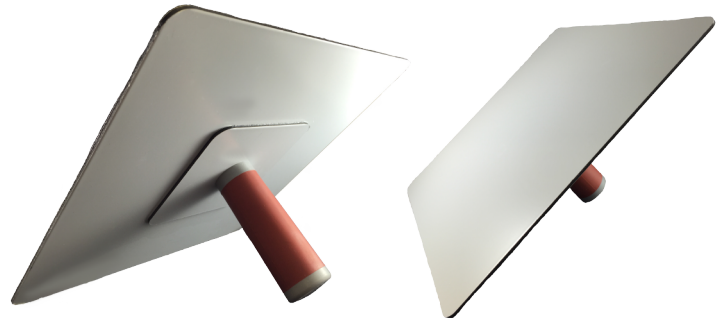

Ultra Light Series
 Only 1.1 lbs
 Aluminum Substrate

Part No.	Description	Box Qty.
HL12	Ultra Light Hawk 12"	12ct.
HL13	Ultra Light Hawk 13"	12ct.
HL14	Ultra Light Hawk 14"	12ct.
HC12	Composite Hawk 12"	12ct.
HC13	Composite Hawk 13"	12ct.
HC14	Composite Hawk 14"	12ct.

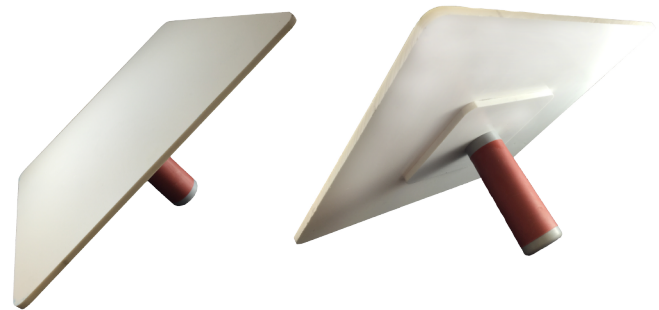

Composite Series
 Weighs 1/3 less than Magnesium Hawks
 Full Composite Construction

Dump Cart


HDDC50

1/2 Yard Dump Cart

Item No.	Description
HDDC50	1/2 yard cart (Complete kit/ no lid)
HDDC50-1	1/2 yard lid
HDDC50-2	1/2 yard rear steel wheels
HDDC50-3	1/2 yard front swivel caster wheels
HDDC50-4	1/2 yard powder-coated HD steel frame
HDDC50-5	1/2 yard HD plastic watertight tub main



HDDC100

1 Yard Dump Cart

Item No.	Description
HDDC100	1 yard cart (Complete kit/ no lid)
HDDC100-1	1 yard lid
HDDC100-2	1 yard rear steel wheels w/ grease fitting
HDDC100-3	1 yard front swivel caster wheels
HDDC100-4	1 yard powder-coated HD steel frame
HDDC100-5	1 yard HD plastic watertight tub main


Features and Benefits

- * Heavy duty construction
- * Heavy Duty Swivel Casters
- * In-line hd bearings
- * Tough Powder-coated
- * Metal base frame
- * 100% water tight construction
- * 1,250lbs capacity



*100% WATER TIGHT CONSTRUCTION

Dollies

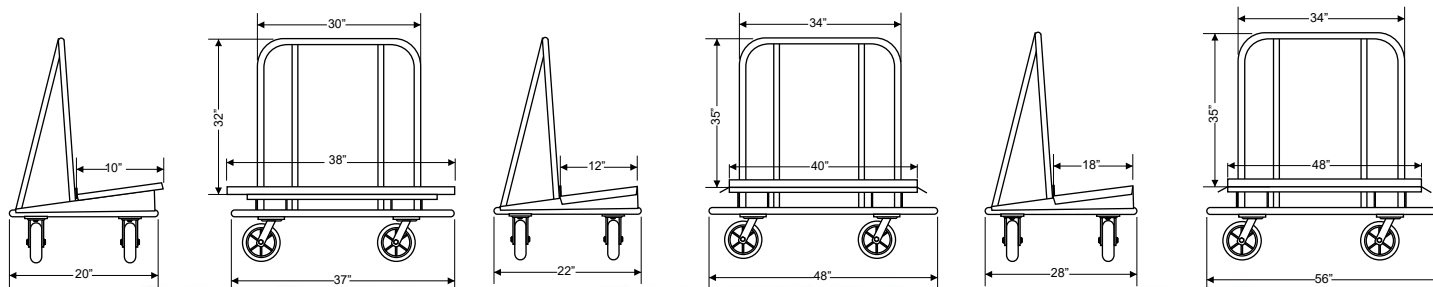

HDRD40S10



HDCD40S12



HDCD40S18

Feature and Benefits

RESIDENTIAL CART WITH SKID PLATE

- 4 Swivel casters, 2 swivel with locking casters
- Maneuver through doorways with ease
- Non-marking casters
- Skid plate for easy loading
- High-quality powder coated finish
- 3200lbs capacity
- 12 Carts to a pallet

COMMERCIAL CART WITH NON MARKING CASTERS

- 4 Swivel casters, 2 swivel with locking casters
- Non-marking casters
- 40" x 12" / 40" x 18" steel plate
- High-quality powder coated finish
- 3200lbs capacity
- 12 Carts to a pallet


Item No.	Description
CAS800SL	8" Non skid wheel w/Lock / Swivel / Non-marking
CAS800F	8" Non skid fixed wheel / Non-Swivel / Non-marking
CAS800S	8" Non skid swivel wheel / Non-marking





Features and Benefits

- Constructed of Rugged T6 Aluminum
- No Assembly Necessary
- Locking Support legs
- 6 Different Height Options
- Fold and Carry Design
- Rubber Non-Slip Feet
- 450lb Weight Capacity
- 48" x 9-1/2" Work Area

450lbs Capacity



Locking height adjuster

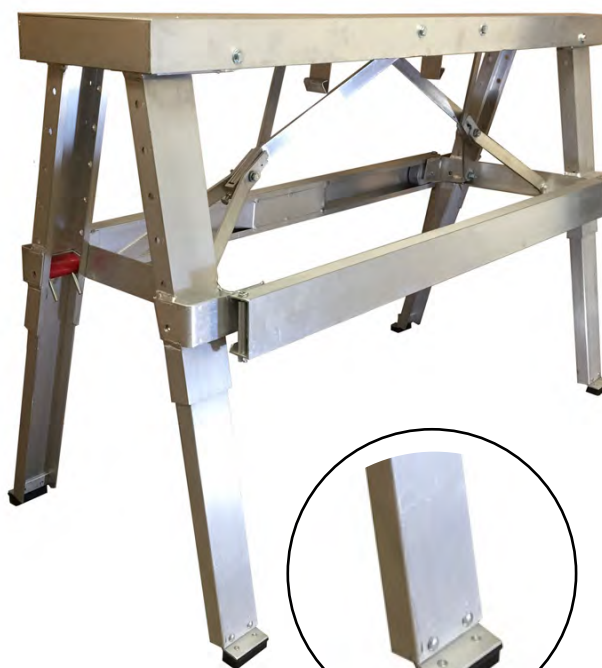

Non-slip foot design

Item No.	Specifications
ADB48912	48" x 9-1/2" Drywall Bench(T6 Alu)

BILL TO:

SHIP TO:

Order Form
Please COPY and FAX to
866-672-9402

Company

Company

☐ NEW ACCOUNT

Street address

Street address

City

State

Zip

City

State

Zip

Phone

Fax

Phone

Fax

Order Date

Buyer's Name

Contact

Requested Ship Date

Item Number	Product Description	Unit Quantity	Per Unit Cost	Extended Product Total

Total

Accept credit cards.



Cardholder's Name (please print)

Credit Card Number

Expiration Date

Blue Point Fasteners 14728 Yorba Court, Chino CA 91710
Tel: 877-779-2583 Fax: 866-672-9402 www.bpfasteners.com

CREDIT APPLICATION

Date: _____

Name of Business: _____ Phone No: _____

Street: _____ Fax No: _____

City/State: _____ Zip Code: _____

Date Business Established: _____

Federal ID#: _____

Resale Tax #: _____ (please provide copy of Certificate)

Email to send invoices _____

Ownership: _____ Name of Owner/Officer _____ Title _____

☐ Corporation _____

☐ Partnership _____

☐ Individual _____

Building is: Location is: Check Box if:

☐ Owned ☐ Downtown ☐ You have ever declared bankruptcy.

☐ Leased ☐ Rural ☐ A company you have had ownership in; has ever declared bankruptcy

☐ Rented ☐ Residence ☐ You have any pending lawsuits against you or your company.

Accounts Payable Manager: _____ Accounts Payable Contact: _____

Amount of Credit Requested: \$ _____

Bank Name: _____ Branch: _____

Street: _____ City/State: _____ Zip: _____

Phone: _____ Bank Contact: _____

Name in which applicant carries bank account _____ Account No.: _____

TRADE REFERENCE

1. Name _____	2. Name _____
Street _____	Street _____
City/State _____	City/State _____
Zip _____	Zip _____
Traded _____	Since _____
Phone _____ Fax _____	Phone _____ Fax _____