



The **D^{MAXX}** Advantage

2 cutting edges
4 lateral supports


Tungsten Carbide
Self-centering point
Chiseling effect

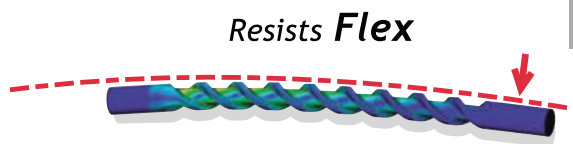

Resists Flex

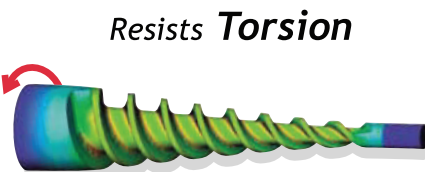

Resists Torsion

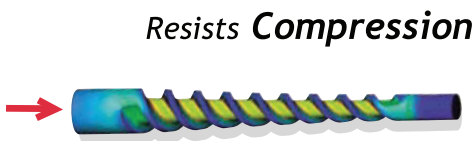

Resists Compression

D^{MAXX}



Quatro^{MAXX} STOP



Adapt^{MAXX}



► More Material

Flex exerted in the lower section of a drill bit is the most likely destructive factor. The progressive core of the spiral adds material and increases the rigidity in this area which is subjected to extreme pressure.

► Anti-blocking System

2 asymmetric cutting edges reduce the risk or blockage when in use on a particularly hard aggregate, or on rebar. The progressive core and the roundness of the flute allow optimal removal of dust and negates any risk of blocking due to dust accumulation.

► Heat Treatment

The hardness of concrete combined with the power of the drill unit to create compression. The heat treatment of the body allows the energy of the drill to be concentrated on the tungsten carbide tip (while absorbing shock waves).

Part No.	Description	Qty.
DX146	1/4" x 6" DMax	Each
DX148	1/4" x 8" DMax	Each
DX386	3/8" x 6" DMax	Each
DX388	3/8" x 8" DMax	Each
DX3812	3/8" x 12" DMax	Each
DX128	1/2" x 8" DMax	Each
DX1212	1/2" x 12" DMax	Each
DX588	5/8" x 8" DMax	Each
DX5812	5/8" x 12" DMax	Each

Part No.	Description	Qty.
QX381116	3/8" x 1-1/16" QMax	Each
QX121316	1/2" x 13/16" QMax	Each
QX1211116	1/2" x 1-11/16" QMax	Each
QX581316	5/8" x 1-3/16" QMax	Each
QX582116	5/8" x 2-1/16" QMax	Each

Part No.	Description	Qty.
AXSP2SDS	Spline to SDS Adapter	Each
AXSDS2SDSP	SDSMAX to SDS PLUS Adapter	Each

